
Steady arm G1" curved with eye with insulation 3 kV, adjustable, L = 1500 mm, with thread M16, SST

Item number D2437-01

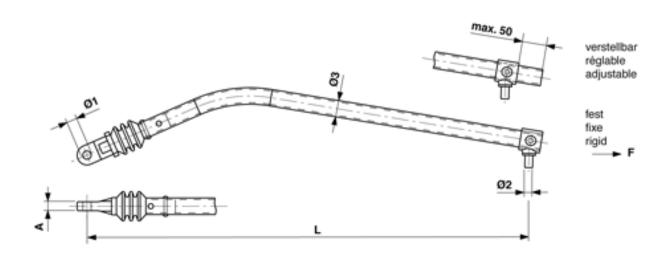

Dimensions

Ø2: M16 Ø1: 17 mm L: 1500 mm A: 18 mm Ø3: 33.7 mm

Material and weight

Material: SST Weight: 4.300 kg

Loads


Breaking load F: 6.3 kN

Specification

Minimum creeping distance: 85 mm for insulator Operating voltage: max. 3000 V

Comments

- Steady arm G1" are also available in aluminum (with reduced breaking load and low weight)
- Minimum order quantity on request
- Other lengths on request



Tel. +41 44 247 47 47 info@kummlermatter.ch kummlermatter.ch

