


Steady arm G1" curved (ahead) with eye and insulation 3 kV, adjustable, L = 1900 mm, with thread M16, SST

Item number D2812-04

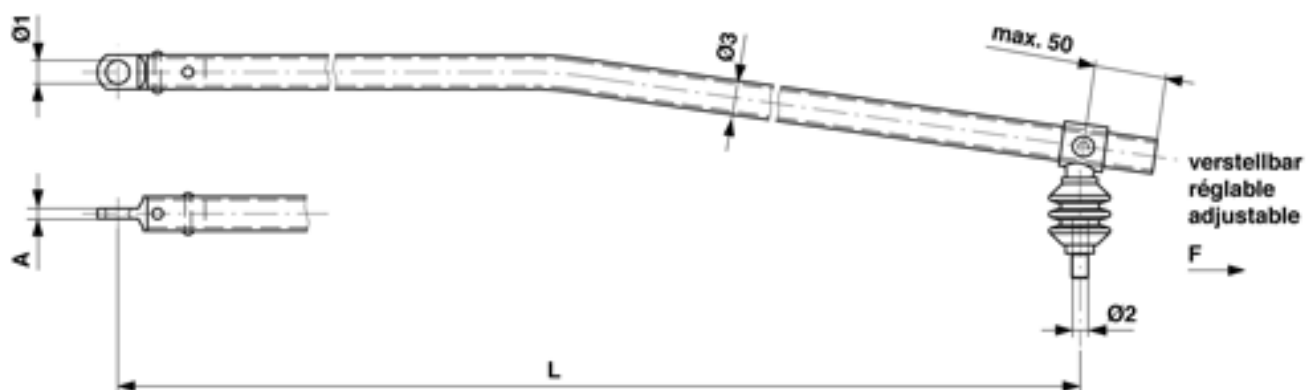

Dimensions

A: 10.000 mm

$\varnothing 1$: 23 mm

$\varnothing 3$: 33.7 mm

$\varnothing 2$: M16

L: 1900 mm

Material and weight

Material: SST

Loads

Breaking load F: 5.5 kN

Specification

Operating voltage: max. 3000 V

Minimum creeping distance: 85 mm for insulator

Comments

- Minimum order quantity on request