


Line insulator to Unistrut channel without suspension screws KUSYS type 2 with simple suspension eye

Item number C2380-02

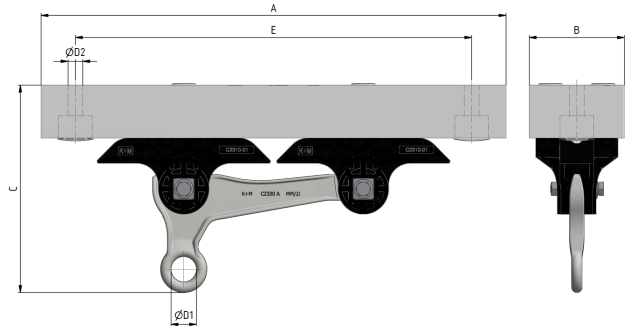

Dimensions

A: 440 mm
B: 90 mm
C: 196 mm
E: 375 mm
ØD1: 24 mm
ØD2: 14 mm

Material and weight

Material: Kst / INOX / Alu
Weight: 3.9 kg

Loads

Tightening torque for bolts and hex-nuts M8: 17 Nm
Tightening torque for suspension screws M12: : 40 Nm
Breaking load horizontal: 5.4 kN

Applicable standards

DIN EN 50119
DIN EN 50124-1
DIN EN 50151
CEI / IEC 60060-1

Function

Insulator body for fastening to Unistrut channel, in straight segments or slight bends. Suspension for tramway hanger wire or steady arms.

Specifications

Operating voltage: max. 1500 V DC

Comments

Attachment to different types of anchoring rails on request.
The suspension can be mounted to cross-spans or pipes by exchanging the clamp.