


Contact wire suspension TW with line insulator KUSYS1, in tangent to cross-span steel/steel-copper cable 0-4° pendulum in tension section

Item number 103322

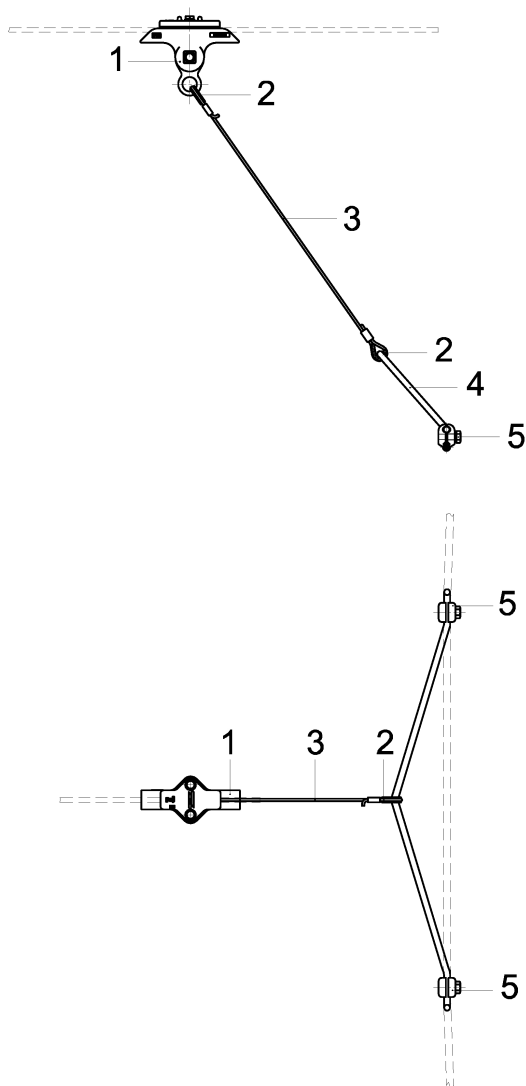

Specifications

Operating voltage: max. 1500 V DC

Comments

- Line insulator GRP/SST/Al
- Accessories SST
- Contact wire clamps Cu

Replacement of

101651