


Contact wire suspension TW with line insulator type 1, in auto-tensioned system to cross-span steel/steel-copper cable 0-4° with 1 adjustable steady arm M16 SST

Item number 103329

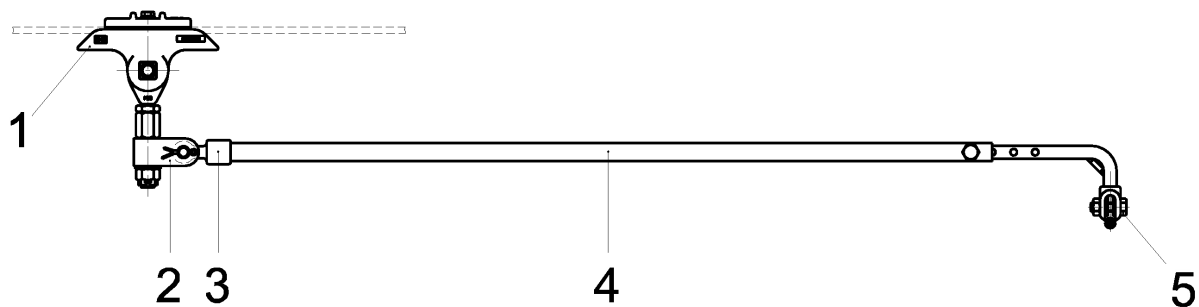

Specifications

Operating voltage: max. 1500 V DC

Comments

- Line insulator GRP/SST/Al

- Accessories SST

- Contact wire clamp CuNiSi

Replacement of

102810