
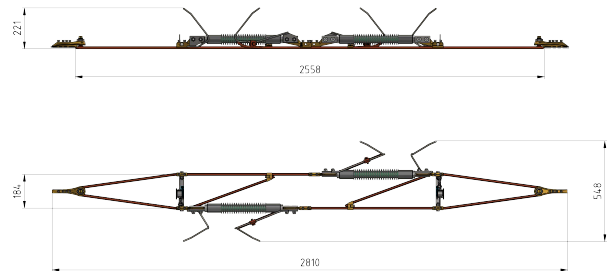


# KUSEC 15 KV AC FOR CONTACT WIRE AC (EN 50149)

Item number B1569-01

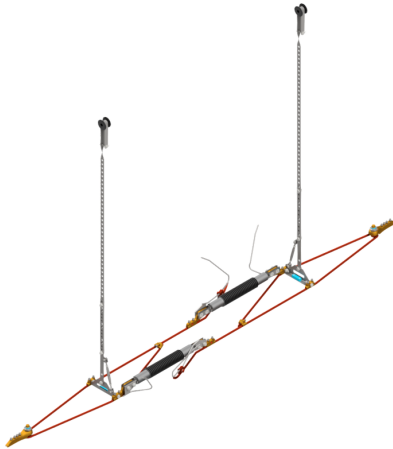

## Dimensions

Height: 224 mm  
Length: 2810 mm  
Width: 184 mm  
Length of suspension: 1420 mm  
Length between the contact wire: 2558 mm  
Packaging: 2600 x 620 x 370 mm

## Material and weight

Weight: 19 kg  
Material: INOX / CuNi2Si / fibreglass reinforced plastic (FRP) / CuMg0.5 / SI / ST (hot-dip galvanised steel)

## Loads

Recommended service load: 10 - 18 kN  
Breaking load: Min. 55 kN

## Applicable standards

EN 50119, IEC 60913

## Function

For the electrical separation of adjacent contact

line sections, with simultaneous mechanical connection. Sector contact is continuously guaranteed and there is no interruption of power. Low installation and maintenance effort thanks to an innovative installation concept; very long maintenance intervals thanks to flexible lightweight design. The section insulator's flexible design allows it to be used for high speeds of up to 250 km/h.

## Specification

Short-circuit current: 40000 A  
Contact wire cross-section: max. 150 mm<sup>2</sup>  
Kerf width: 5.6 mm  
Creepage distance: 830 mm  
Arcing horn distance: 140 mm  
Operating voltage: 15 kV AC

## Comments

- Product can be individualised for various contact wire types

## Downloads

<https://www.kummlermatter.ch/en/offers/downloads>

Kummler+Matter AG  
Rietstrasse 14  
8108 Dällikon

Tel. +41 44 247 47 47  
info@kummlermatter.ch  
kummlermatter.ch



A COLAS RAIL COMPANY