


MIDDLE PART KUSEC 15 kV AC

Item number B1598-01

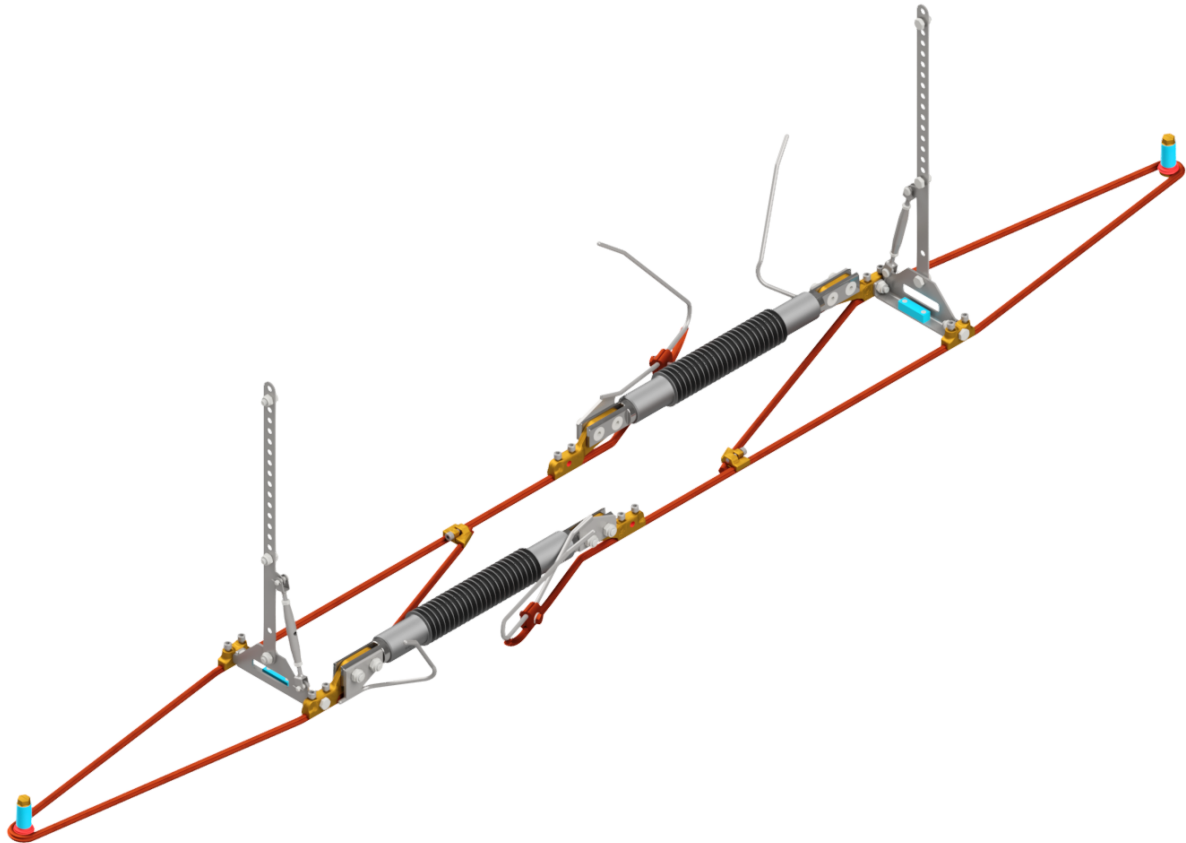

Dimensions

Height: 224 mm
Length: 2558 mm
Width: 184 mm
Packaging: 2600 x 620 x 370 mm

Material and weight

Weight: 18 kg
Material: INOX / CuNi2Si / fibreglass reinforced plastic (FRP) / CuMg0.5 / SI / ST (hot-dip galvanised steel)

Loads

Recommended service load: 10 - 18 kN
Breaking load: Min. 55 kN

Applicable standards

EN 50119, IEC 60913

Function

Replacement piece for revision of section insulator KUSEC 25kV AC.

Specification

Short-circuit current: 40000 A
Creepage distance: 830 mm
Arcing horn distance: 140 mm

Operating voltage: 15 kV AC

Downloads

<https://www.kummlermatter.ch/en/offers/downloads>