


# MIDDLE PART KUSEC 15 kV AC

Item number B1598-01

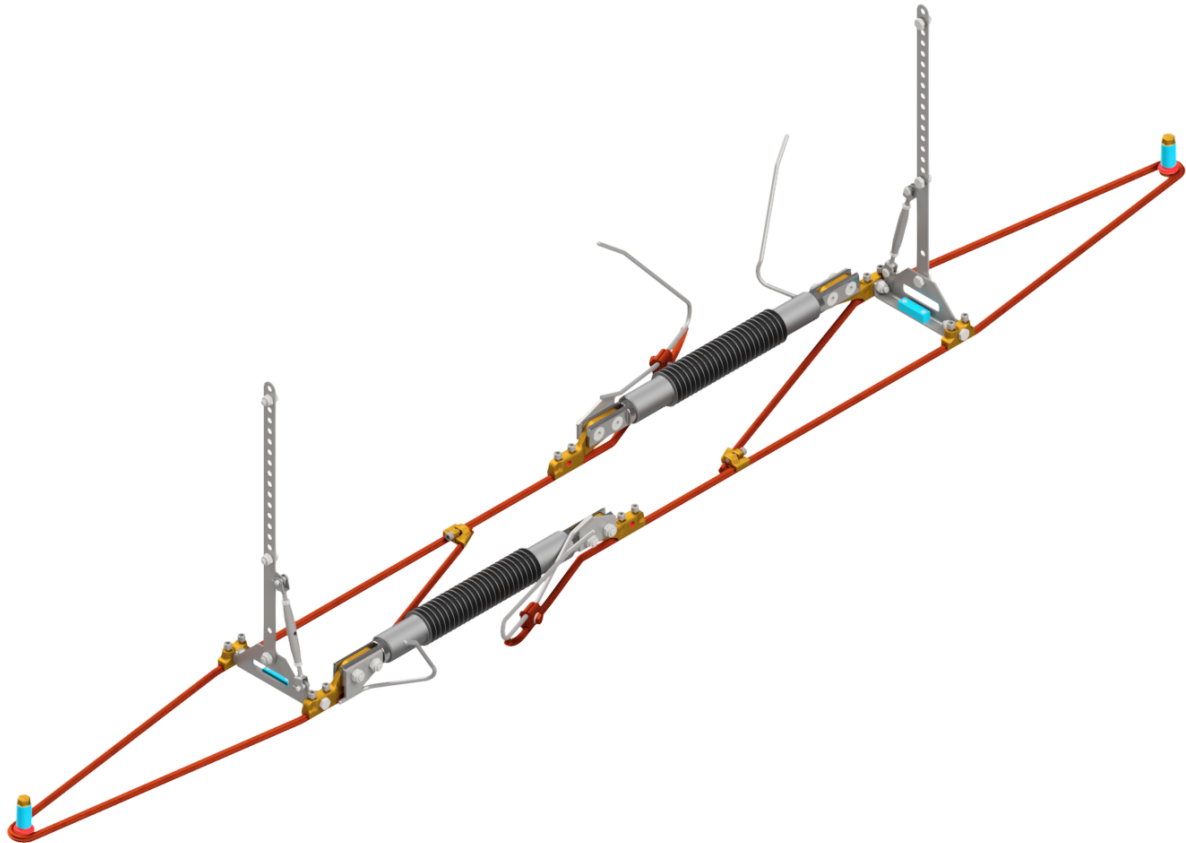

## Dimensions

Height: 224 mm  
Length: 2558 mm  
Width: 184 mm  
Packaging: 2600 x 620 x 370 mm

## Material and weight

Weight: 18 kg  
Material: INOX / CuNi2Si / fibreglass reinforced plastic (FRP) / CuMg0.5 / SI / ST (hot-dip galvanised steel)

## Loads

Recommended service load: 10 - 18 kN  
Breaking load: Min. 55 kN

## Applicable standards

EN 50119, IEC 60913

## Function

Replacement piece for revision of section insulator KUSEC 25kV AC.

## Specification

Short-circuit current: 40000 A  
Creepage distance: 830 mm  
Arcing horn distance: 140 mm

Operating voltage: 15 kV AC

## Downloads

<https://www.kummlermatter.ch/en/offers/downloads>