


MIDDLE PART KUSEC 25kV AC

Item number B1597-01

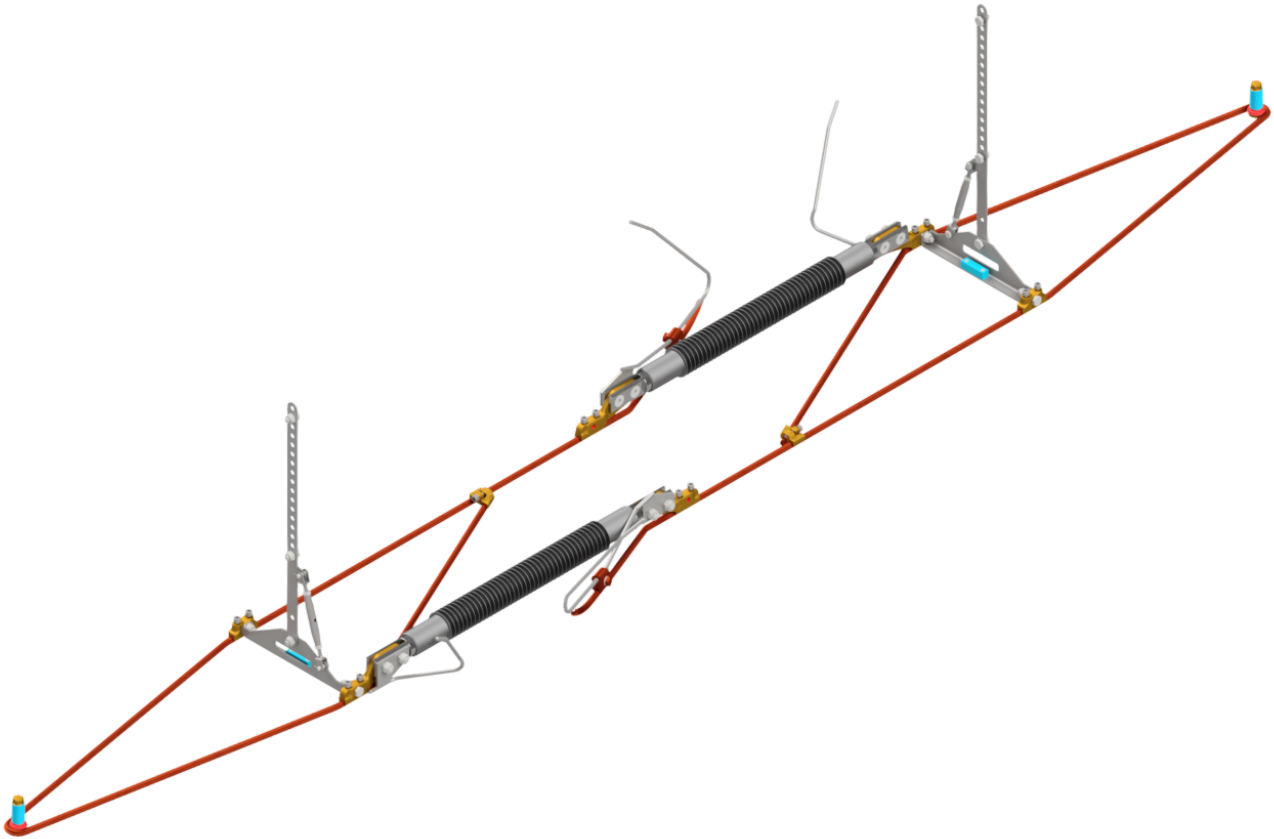

Dimensions

Height: 228 mm
Length: 3185 mm
Width: 280 mm
Packaging: 3500 x 700 x 300 mm

Material and weight

Weight: 21 kg
Material: INOX / CuNi2Si / fibreglass reinforced plastic (FRP) / CuMg0.5 / SI / ST (hot-dip galvanised steel)

Loads

Recommended service load: 10 - 20 kN
Breaking load: Min. 69 kN

Applicable standards

EN 50119, IEC 60913

Function

Replacement piece for revision of section insulator KUSEC 25kV AC.

Specification

Short-circuit current: 40000 A
Creepage distance: 1250 mm
Arcing horn distance: 250 mm

Operating voltage: 25 kV AC

Downloads

<https://www.kummlermatter.ch/en/offers/downloads>