


# Suspension section insulator, with hanger cable Cu adjustable and turnbuckle M6, for section insulator for railway, catenary

Item number 102117

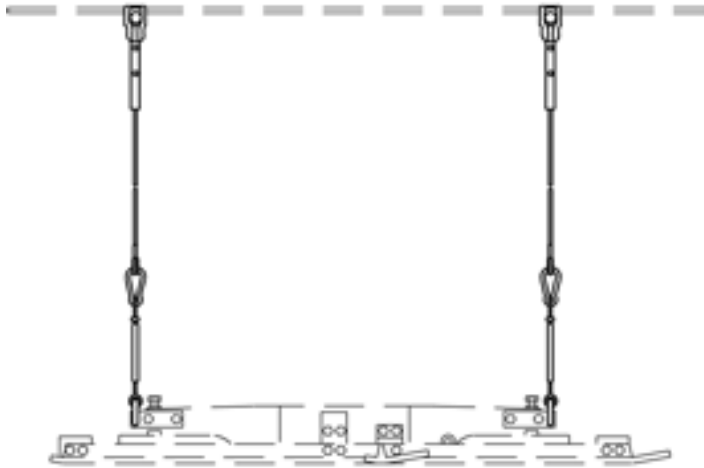

## Comments

- Without insulation

- To messenger cable 35-95 mm<sup>2</sup>
- To messenger wire 80-120 mm<sup>2</sup>
- 2 suspensions are needed per section insulator