


# Line insulator KUSYS1 complete suspension threaded bolt M16 rigid, to pipe 2.5"

Item number C2372-03

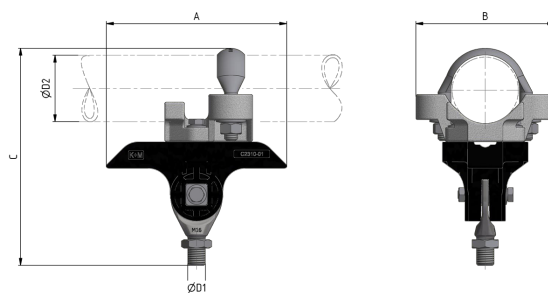

## Dimensions

A: 164 mm

B: 126 mm

C: 197 mm

ØD1: M16

ØD2: 2.5" (76.1 mm)

## Material and weight

Material: Kst / INOX / Alu

Weight: 1.63 kg

## Loads

Breaking load horizontal: 4.6 kN/ H: 90 mm

Tightening torque for bolts and hex-nuts M8: 17 Nm

Tightening torque for bolts M12: 40 Nm

## Applicable standards

DIN EN 50119

DIN EN 50124-1

DIN EN 50151

CEI / IEC 60060-1

## Function

Insulator body for fastening to pipes in straight segments or slight bends. Rigid threaded bolt suspension allowing the attachment of various railway, tramway and trolley bus components.

## Specifications

Operating voltage: max. 1500 V DC

## Comments

The application in overhead contact lines requires a wide insulation of the support structure to the support bases.

Optional: Exchanging the u-bolt allows mounting to pipes Ø45 - 80mm mm. The suspension can be mounted to cross-spans or ceilings by exchanging the clamp.